

REV.	Date	INSTRUCTION
1.6	2007/02/28	Modify Dimension▲

[1815011S] SERIES

Wafer Connector, Pitch 1.5mm
DIP, Straight, Type 1.

Physical:

Housing: NY66, UL 94V-0+Glass Fiber
Contact: Brass (Tin Plated)


Specifications:

Voltage Current Rating: 1A 50V AC/DC
Insulation Resistance: 500M ohm min
Contact Resistance: 20m ohm max
Dielectric Withstanding Voltage: 800VAC
Temperature Rating: -25°C To +85°C
Ware Soldering Temperature:
Lead Part: 245±5°C, 5 Sec.
RoHS Part: 260±5°C, 5 Sec.

ORDERING CODE:

1815011 S 06 00 -LF

- 1. SERIES NO. 1 2 3 4 5
- 2. STYLE S=STRAIGHT
- 3. NO. OF PINS 02~13 PINS
- 4. PLATED 00=TIN PLATED
- 5. PRODUCT'S STATUS NON-SHOWED=STANDARD TYPE
LF=RoHS COMPLIANT

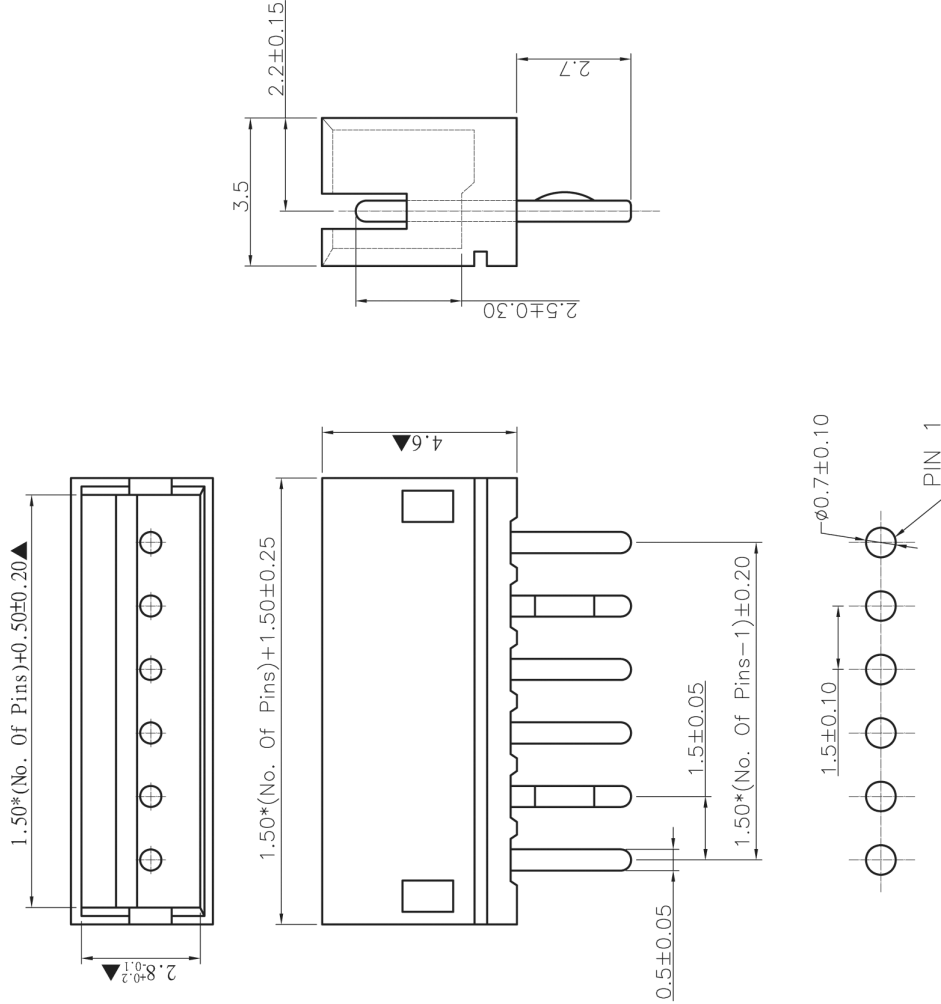

TOP VIEW

PCB LAYOUT RECOMMENDED



CUSTOMER COPY



REV.	DATE	APPD.	CHR.	DR.	TOLERANCE UNLESS OTHERWISE SPECIFIED
1.4	2006/10/12	DENNIS	DDP	FXF	LINEAR 0.0±0.30
1.5	2007/02/09	NAOMI	MICHAEL	CARY	0.00±0.20
1.6	2007/02/28	NAOMI	NAOMI	NAOMI	ANGLES ±3

MC-COMPONENTS

TITLE	WAFER CONNECTOR
DWG NO.	1815011SXXXX
SCALE	1:1 SHEET 1 OF 1

UNIT: mm
SIZE: A4