


Note:
 1.DSP-20P Inner Mould DM1-H1362.
 2.DSP-20P SR Mould DM2-E2811.

9	GC300020	Copper Foil	W8*20mm-RO
8	GC330030	Stick	Tin Stick-RO
7	JA860020	H.S.T	Black Heat Shrink Tube.ø1.5*L8mm-RO
6	JA860870	H.S.T	Black Heat Shrink Tube.ø0.8*L8mm-RO
5	J1190010	PE	Transparent PE-RO
4	JB513960	SR	PVC 45P-RO Black(T-000)
3	GC340080	Tin	OD:0.6mm-RO
2	2A790010	Conn.	DSP-20PSGS4-K-A-RO Shell Nickel Plated Contact Gold Plated 15u"
1		Cable	UL20276 (1P#30+D+AL+Mylar)*5C+4C#30-RO+Mylar+AB OD6.5 Black(T-000)85% BRAID
NO	Part No	Title	Description

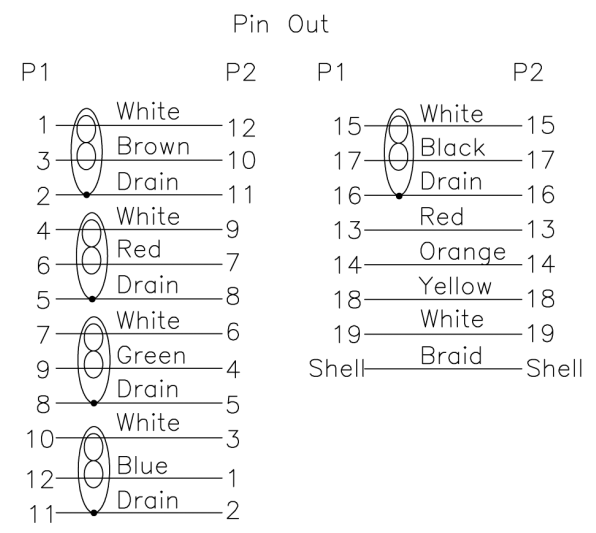

PART NO.

SERIES NO. CK 01 1 3 1 1 A02A E XXX

CK=Displayport
 CONNECTOR OPTION
 01=DP-20M/DP-20M (MOLDED/MOLDED)
 CONNECTOR TYPE
 1=M/M
 CABLE COLOR
 3=BLACK

LENGTH NO.
 1M0=1000±.50mm
 1M5=1500±.20mm
 1M8=1800±.20mm
 183=1830±.20mm
 2M0=2000±.20mm
 305=3050±.10mm
 GREEN OPTION:
 E=RoHS TYPE.
 CONTACT/SHELL PLATING:
 1=Gold Plated 15u"/Nickel
 CABLE OPTION:
 1=UL20276.30AWG,OD6.5,85Braid



UNLESS OTHERWISE SPECIFIED TOLERANCE		MC-COMPONENTS
0.	±1.0	
.0	±0.5	
.00	±0.3	
SCALE: AS SHOWN	UNIT: mm	
DRAWN JOE	08/31/09	DRAWN NAME: DP-20M/DP-20M CABLE
CHECKED	/ /	
08/31/09 APPROVED	/ /	PRODUCT NO. CK011311A02AEXXX
REV. A	REV. A	FILE NAME: CK011311A02AE(25)

A	ECN-0908171(Jocelyn)	DESCRIPTION	DATE	SIZE A4	REV. A
REV.					