



# 60x60x25mm

- Airflow: 15.3~31.2 CFM
- Static Pressure: 2.3~11.8 mm-H<sub>2</sub>O
- Blade / Housing: Plastic Material UL 94V-0 P.B.T.
- Lead Wire: UL1007 #24 AWG
- Weight: 56 g



## MC-COMPONENTS

Model No.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Max. Airflow CFM	Max. Static Pressure mm-H <sub>2</sub> O	Current mA	Power Consumption W	Life at 40°C L10 Hour	P-Q Curve	Noise Level dB(A)
FD126025LB	2B	12	7~13.2	3000	14.4	5.0	50	0.60	80000	5	24.9
FD126025MB	2B		7~13.2	4100	19.7	7.5	80	0.96	80000	4	31.0
FD126025HB	2B		7~13.2	5100	24.5	9.3	120	1.44	75000	3	36.0
FD126025EB	2B		7~13.2	5600	26.9	10.2	150	1.80	65000	2	38.1
FD126025EB	2B		7~13.2	6500	31.2	11.8	190	2.28	65000	1	41.0
FD246025LB	2B	24	12~26.4	3000	13.5	2.3	35	0.84	80000	5	19.5
FD246025MB	2B		12~26.4	4100	19.7	7.5	55	1.32	80000	4	31.0
FD246025HB	2B		12~26.4	5100	24.5	9.3	75	1.80	75000	3	36.0
FD246025EB	2B		12~26.4	5600	26.9	10.2	100	2.40	65000	2	38.1
FD246025EB	2B		12~26.4	6500	31.2	11.8	120	2.88	65000	1	41.0

2B: 2-ball bearing BS: 1-ball 1-sleeve bearing L: sintetico bearing S: sleeve bearing

Voltage Available

05 12 24 48


Bearing System Available

2B L S

Function Available

N A I F R Q S T M V C P D W U

## PERFORMANCE P-Q CURVE

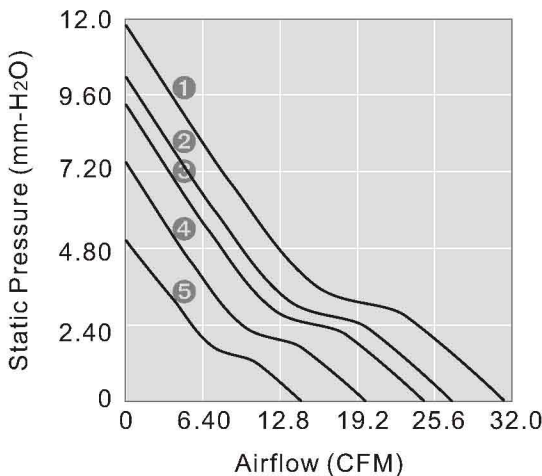

## OUTLINE DIMENSIONS

