



NOTES:
 1. 100% TEST OPEN, SHORT & MISWIRE
 2. PACKING: 1PCS/BAG.

①	1	PE BAG	150x230L
⑩	2	MINI TIE	120MM
⑨	2	SCREW	4#40(BIG E30.5L)
⑧	1	OUTER MOLD	50P PVC
⑦	1	AL FOIL	25x70MM
⑥	1	INNER MOLD	PE OR PVC
⑤	1	CONNECTOR	DB 9F SOLDER TYPE CONTACT GOLD FLASH BLUE/NICKEL
④	1	OUTER MOLD	50P PVC
③	1	INNER MOLD	PE OR PVC
②	1	CONNECTOR	MD 8M SOLDER TYPE CONTACT TIN PLATED BLACK/NICKEL
①	1	CABLE	UL2464 CSA 28AWGx8C+D+AL OD:5.0mm
ITEM	QTY	PART NUMBER	DESCRIPTION
PARTS LIST			

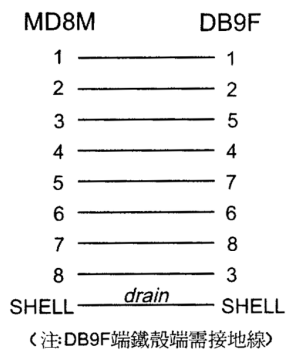

PART NO.

SERIES NO. C6 10 2 X XXX E XXX
 CONNECTOR OPTION
 10=MID08/DB09
 (MOLDED/MOLDED)
 CONNECTOR TYPE
 2=M/F

LENGTH NO.
 EX:03F=3FT,3M5=3.5M
 50C=50CM
 ENVIRONMENT PROTECTION MATERIAL:
 E=RoHS
 TYPE.
 A02=L1
 B02=L2
 CABLE COLOR
 1=BEIGE
 2=GRAY
 3=BLACK

PART NO.	L () ±	APPROVED

LENGTH TOTAL TOLERANCE:
 500 ≥ L ±20
 500 < L < 1000 ± 30
 L ≥ 1000 ± 50



UNLESS OTHERWISE SPECIFIED TOLERANCE	
0.	±1.0
.0	±0.5
.00	±0.3
SCALE: AS SHOWN	UNIT: mm

MC-COMPONENTS

C	ECN-0702038(Sally) (3,G)(8,D)(8,G)	02/02/07	DRAWN	JOE	02/06/07	DRAWN NAME:
B	ECN-0701179(Sally) (2,D)(2,E)(3,E)(8,C)(9,D)	01/26/07	CHECKED	Deal	02/09/07	MID8M/DB09F CABLE
A	ECN-0612173(Sally)	12/21/06	APPROVED	Blank	02/12/07	PRODUCT NO. C6102XXXXEXXX
REV.	DESCRIPTION	DATE	SIZE	A4	REV. C	FILE NAME: C6102XA02E(N3)